




Togg  
Model T10X  
( As of 2023 )

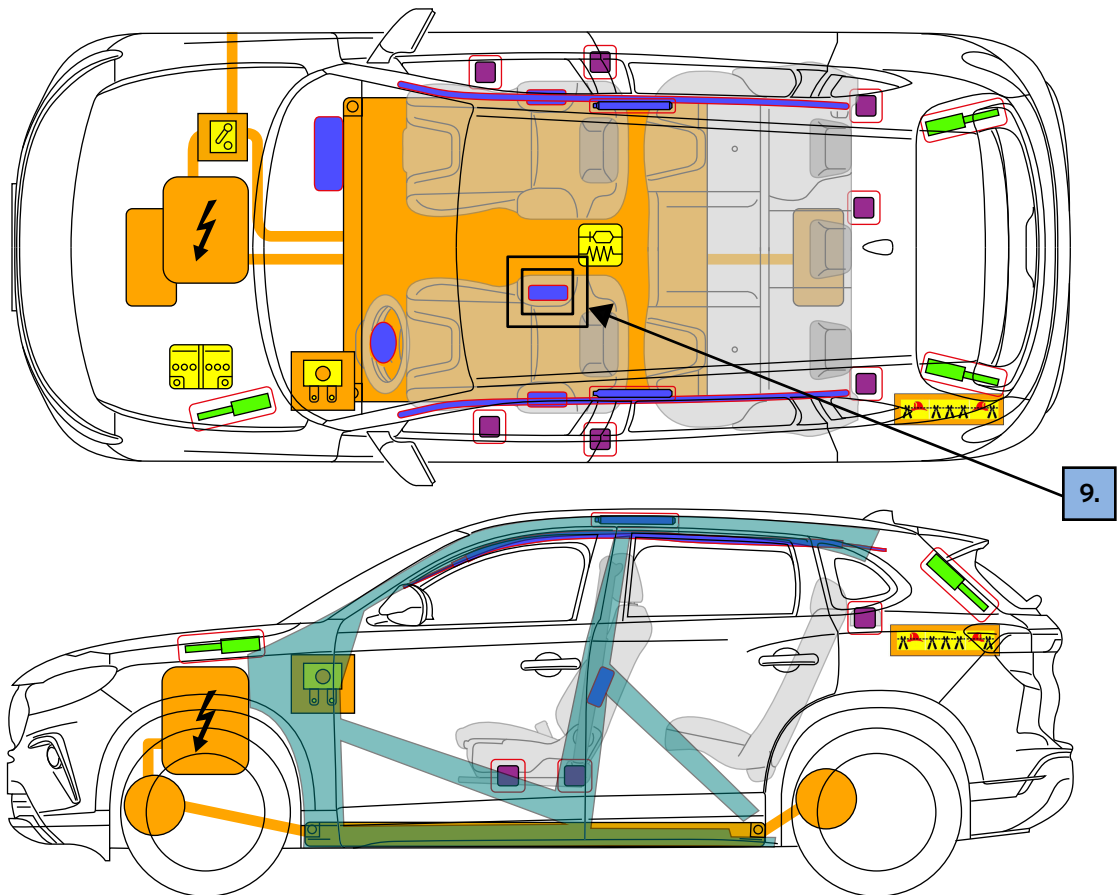


	Airbag		Stored gas inflator		Seatbelt pretensioner		SRS Control Unit		Low voltage device that disconnects high voltage
	Battery low-voltage		Gas strut/pre-loaded spring		High strength zone		Zone requiring special attention		High-voltage power cable/component
	Fuse box disabling high-voltage system		High-voltage battery pack		Cable cut				

## 1. Identification / recognition



LACK OF ENGINE NOISE DOES NOT MEAN VEHICLE IS OFF. SILENT MOVEMENT OR INSTANT RESTART CAPABILITY EXISTS UNTIL VEHICLE IS FULLY SHUT DOWN. WEAR APPROPRIATE PERSONAL PROTECTIVE EQUIPMENT (PPE).

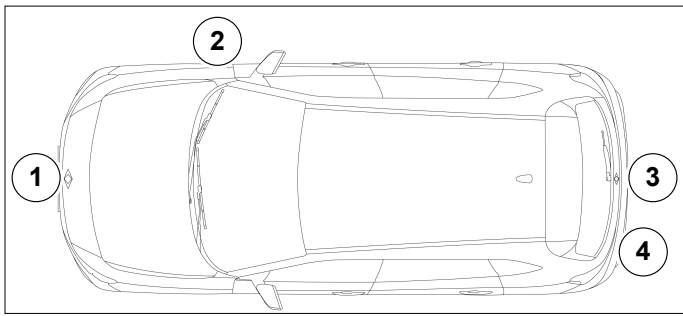

1 Center of hood



2 HV charging socket



3 Center of tailgate




4 Left of tailgate




## 2. Immobilisation / stabilisation / lifting

### Immobilise / stabilisation:

1. Block the wheels and engage parking brake.
2. Push the P (park) button (1) or lift up the park brake switch (2) to select the P (park) position.

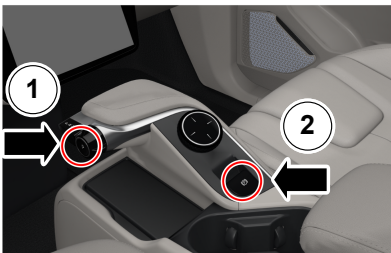


The instrument cluster shows a message whether the park brake is engaged or not.

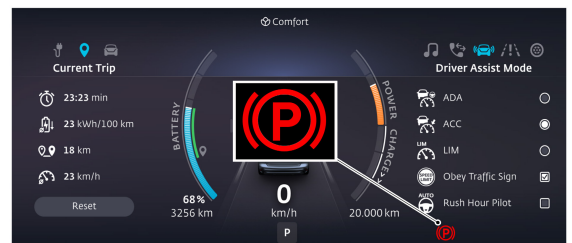

### Lifting points:

- Suitable lifting points
- Suitable stabilisation points on the side
- High-voltage battery

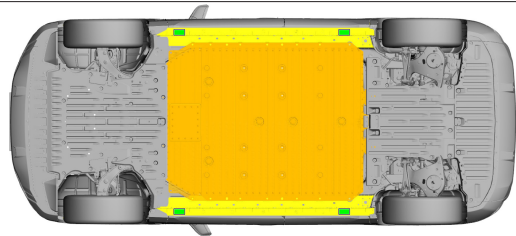


## 3. Disable direct hazards / safety regulations



**Switch off the ignition:** Press the START/STOP button without actuating brake pedal.






**Main disabling method:** The high-voltage disconnect is located under the hood below the beauty cover, and it is indicated with a sign.



- 1- Open the hood and remove the beauty cover.
- 2- Disconnect the electric connector.

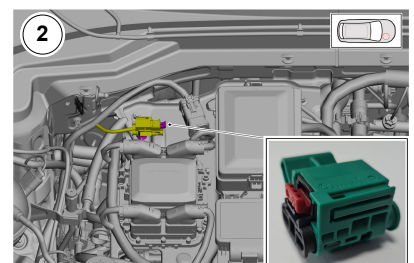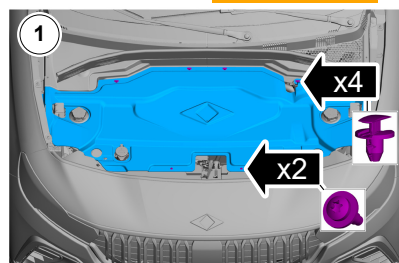



- 3- Pull the release
- 4- Push the release down
- 5- Pull out the switch



#### Alternative disabling method 1 : Actuating the alternative high-voltage disconnect.




- 1- Remove the fuse box cover.
- 2- Pull the label to remove the fuse (F17/5A).  
(Location- Cabin fuse box)

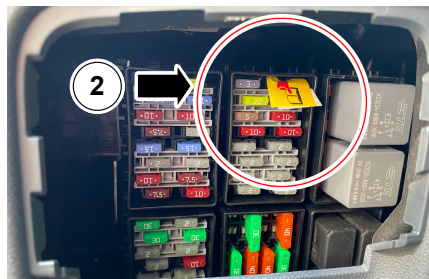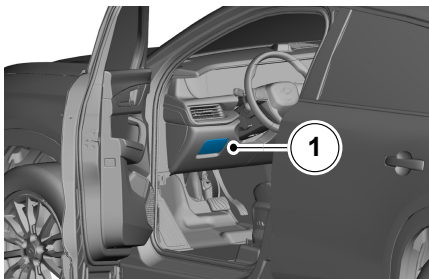


#### Alternative disabling method 2 : Actuating the alternative high-voltage disconnect. (High-voltage cut point)






- 1- Remove the rear fuse box cover.
- 2- Cut the cable at the marked point.



#### Disconnect 12 volt battery :



- 1- Open the hood and remove the beauty cover.
- 2- Loosen the nut and disconnect the negative terminal.

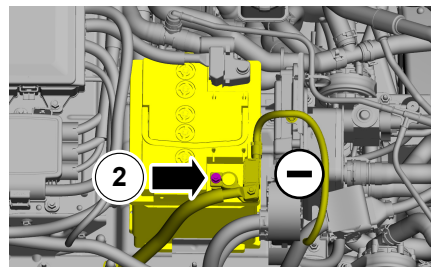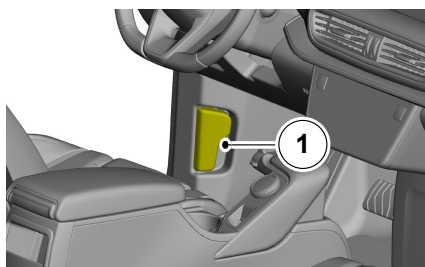

#### Safety regulations:




- Always assume the vehicle is powered, even if it is silent!
- Make sure that the vehicle is immobilized and the propulsion system is deactivated.
- Be aware that not every high-voltage component is labelled.
- Never touch, cut, or open any orange high-voltage power cable or high-voltage component.
- In case of a collision with airbag deployment and/or seat belt pretensioner activation, the propulsion system will be disabled. The restraint systems are still active.
- Always wear the appropriate personal protective equipment (PPE).
- Do not attempt to open high-voltage battery.

4. Access to the occupants

Seat adjustment



Steering column adjustment

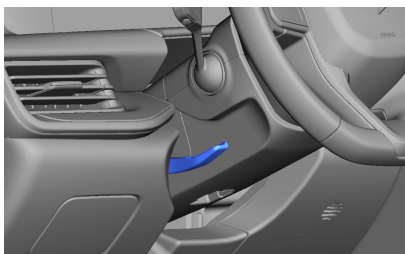















Glass type

- A. Laminated glass.
- B. Tempered glass.




5. Stored energy / liquids / gases / solids

	400V	    
	12V	  
	R - 1234yf 0.610 kg	  




When conventional antifreeze/coolant leaks from the battery pack, it can become unstable with risk of thermal runaway. An increasing battery pack temperature might be an indicator of thermal runaway.



6. In case of fire



USE LARGE AMOUNTS OF WATER



POTENTIAL RISK OF BATTERY RE- IGNITION /  
DELAYED IGNITION!

7. In case of submersion


- 1 - There is no increased risk of electric shock in water resulting from the high-voltage system.
- 2- If possible, remove the vehicle from the water and continue with the deactivation of high-voltage system procedure for this vehicle (see chapter 3).

8. Towing / transportation / storage

Recovery tow hook storage



Location front tow hook

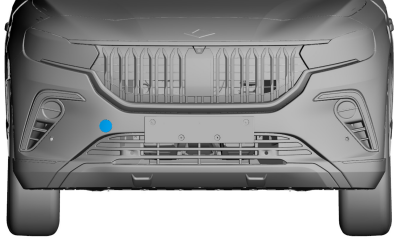


Location rear tow hook







STORE VEHICLE IN AN OPEN AIR PARKING AT SAFE  
DISTANCE > 5M FROM OTHER OBJECTS OR VEHICLES!



POTENTIAL RISK OF BATTERY RE - IGNITION /  
DELAYED IGNITION!

Towing



## 9. Important additional information

Center airbag



Contact details

1- Togg Care and Roadside Assistance : **0 850 222 86 44**

2-Togg User Support Email : [toggcare@togg.com.tr](mailto:toggcare@togg.com.tr)

## 10. Explanation of pictograms used

	Remove smart key		Electric vehicle
	Warning, Electricity		Flammable
	General warning sign		Hazardous to human health
	Warning; low temperature		Acute toxicity
	Air-conditioning component		Corrosives
	Use water to extinguish the fire		Bonnet
	Use thermal Infrared camera		Trunk